
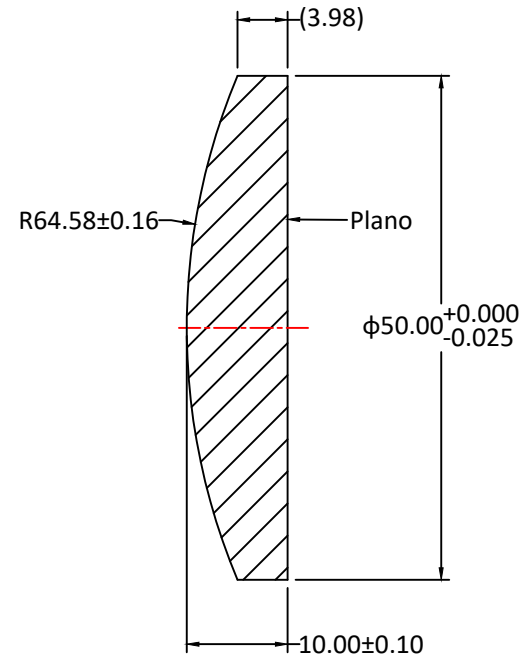



RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
64.58 CX	±0.16	3	0.5	90%	50.00	+0/-0.025	H-K9L	517642	10.00	±0.10
Plano	-	3	0.5	90%						

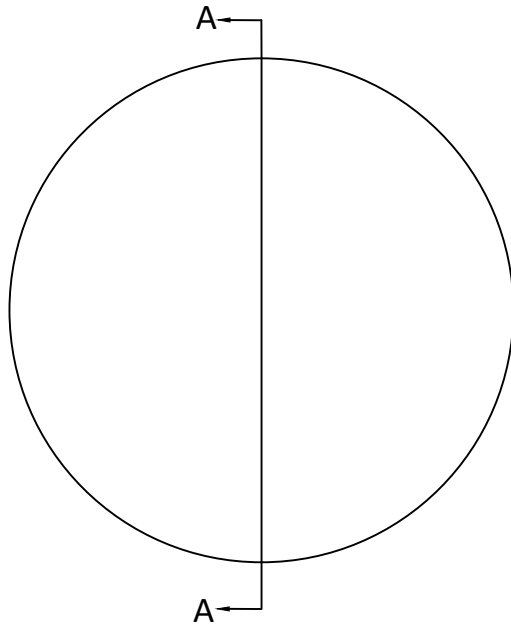

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 125.00±1%
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5×45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: Ravg 0.5% @ 630-1100nm @ 0°AOI

UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
DIMENSIONS ARE IN mm		DRAWN	Sally Song			10.2.24
TOLERANCES:		CHECK			TITLE: DIAMETER 50.00MM, EFL 125.00MM, H-K9L, NIR 1 COATED, PLANO-CONVEX LENS	
FRACTIONAL ±		ENG APPR.				
ANGULAR: ±3 ARC MIN		MFG APPR.				
TWO PLACE DECIMAL: ±0.10		QA	Ann Chen	12.18.24		
THREE PLACE DECIMAL: ±0.05		COMMENTS				
INTERPRET GEOMETRIC TOLERANCING PER:				SIZE	DWG.NO.	REV
MATERIAL H-K9L				A	L-PX0050125050	0
FINISH						
DO NOT SCALE DRAWING	PROJECT NO.	SCALE:	WEIGHT:	SHEET 1 OF 1		