
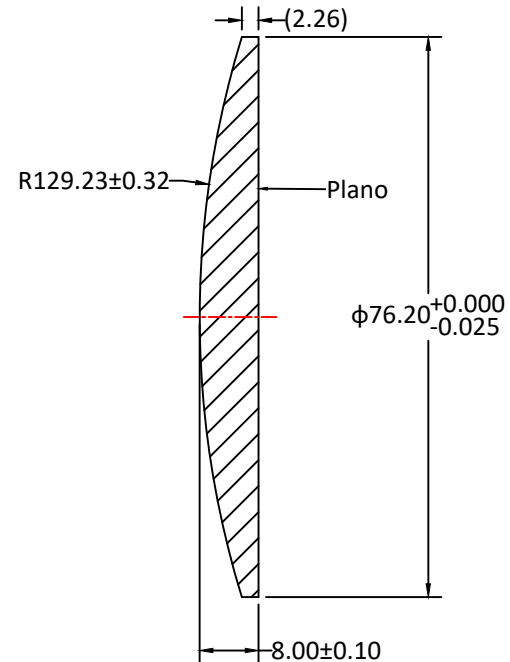


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
129.23 CX	±0.32	3	0.5	90%	76.20	+0/-0.025	H-K9L	517642	8.00	±0.10
Plano	-	3	0.5	90%						

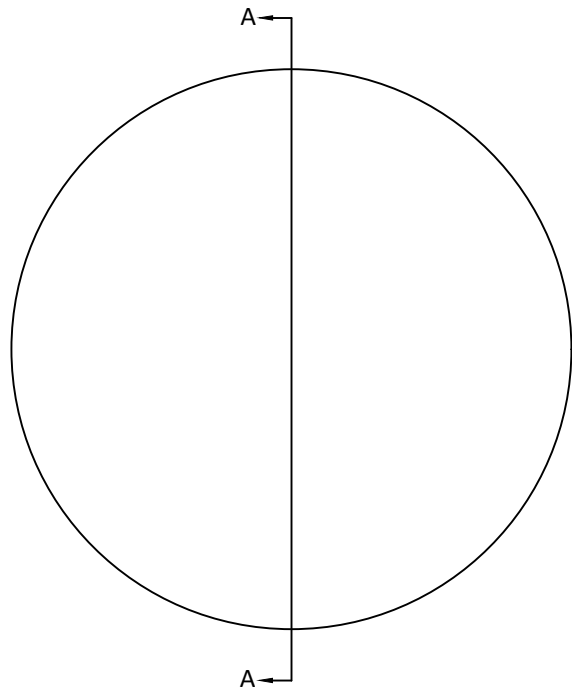

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $250.00 \pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: $R_{avg} < 0.5\%$ @ 1050-1700nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
DIMENSIONS ARE IN mm		DRAWN	Sally Song		
TOLERANCES:		CHECK			TITLE: DIAMETER 76.20MM, EFL 250MM, H-K9L, NIR 2 COATED, PLANO-CONVEX LENS
FRACTIONAL \pm		ENG APPR.			
ANGULAR: ± 3 ARC MIN		MFG APPR.			
TWO PLACE DECIMAL: ± 0.10		QA	Ann Chen	10.18.24	
THREE PLACE DECIMAL: ± 0.05		COMMENTS			
INTERPRET GEOMETRIC TOLERANCING PER:					SIZE
MATERIAL H-K9L					DWG.NO.
FINISH					REV
DO NOT SCALE DRAWING		PROJECT NO.			A
					L-PX006025076Z
					0
		SCALE:			WEIGHT:
		SHEET 1 OF 1			