
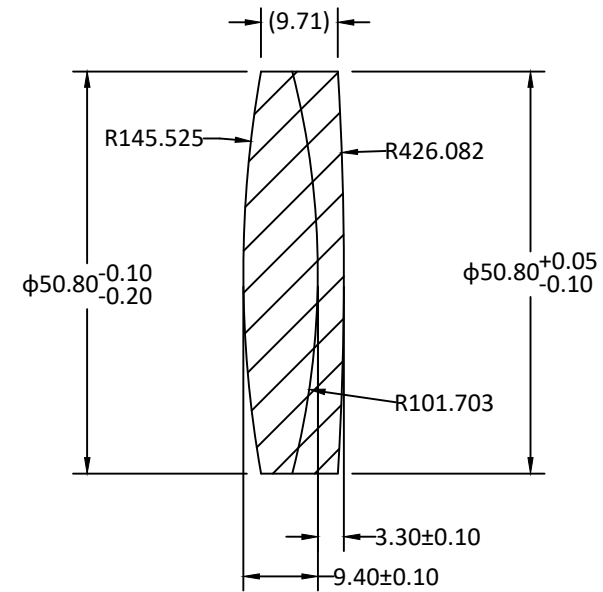


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
145.525 CX	±0.36	5	2	90%	50.80	-0.10/-0.20	N-BK7	517-642	9.40	±0.10
101.703	±0.25	5	2	90%	50.80	+0.05/-0.10	H-F3	617-367	3.30	±0.10
426.082 CX	±1.06	5	2	90%						

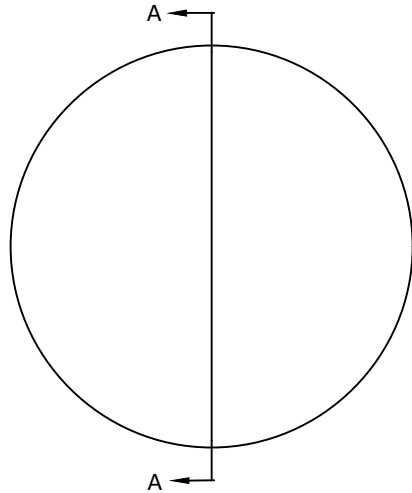

SECTION A-A

Notes:

- ALL DIMENSIONS IN MM
- TOLERANCE UNLESS SPECIFIED ± 0.10
- MATERIAL GRADE B, FA PER MIL-G-174, SCHOTT OR EQUIVALENT, RoHS COMPLIANT
- MANUFACTURE PER MIL-PRF-13830
- POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
- SURFACE QUALITY : 60-40 SCRATCH-DIG
- CHAMFER EDGES: 0.5×45° MAX UNLESS SPECIFIED
- CENTRATION TOLERANCE: 3.0' MINUTES MAX
- EFL: 250MM ± 2%
- DESIGN WAVELENGTH: 587.6NM
- COATING: UNCOATED
- CEMENT USING NORLAND NOA61 OR EQUIVALENT

UNLESS OTHERWISE SPECIFIED:							
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05	DRAWN	Sally Song	12.10.24	 TITLE: DIAMETER 50.8MM, EFL 250MM, ACHROMAT LENS			
	CHECK						
	ENG APPR.						
	MFG APPR.						
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	12.18.24				
MATERIAL	COMMENTS			SIZE	DWG.NO.	REV	
FINISH				A	L-AC001025050Z	0	
DO NOT SCALE DRAWING	PROJECT NO.			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	