
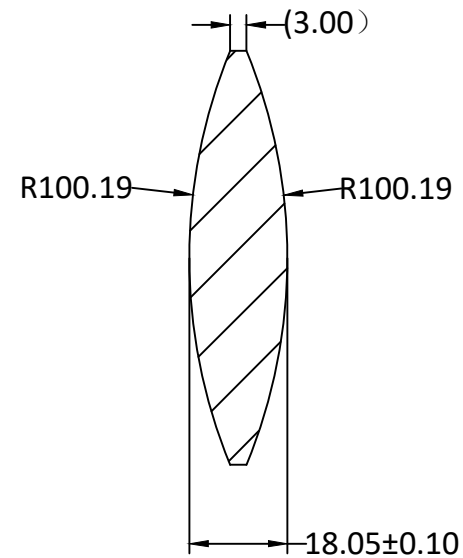


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
100.19 CX	±0.25%	3	1	90%	76.20	+0/-0.10	H-K9L	517642	18.05	±0.10
100.19 CX	±0.25%	3	1	90%						

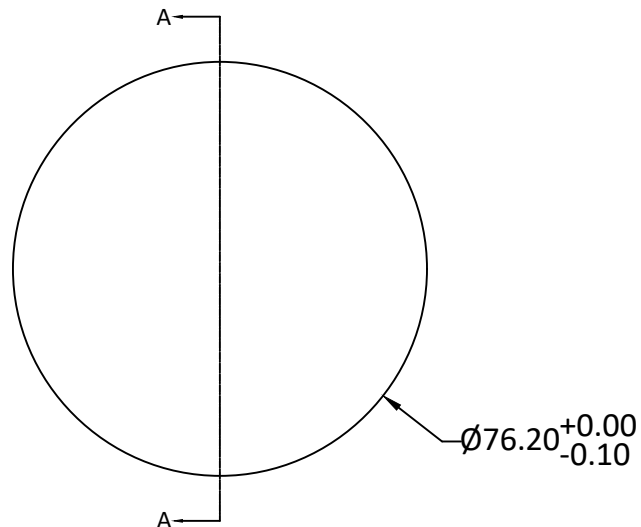

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 100mm $\pm 2\%$
7. SURFACE QUALITY : 60-40 SCRATCH-DIG
8. CHAMFER EDGES: 0.5 $\times$ 45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE:3.0' MINUTES MAX
10. COATING:S1 & S2: ¼ WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400-700nm H-K9L

UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
DIMENSIONS ARE IN mm		DRAWN	Sally Song		
TOLERANCES:		CHECK		TITLE: DIAMETER 76.2MM, EFL 100MM, H-K9L BICONVEX LENS	
FRACTIONAL $\pm$		ENG APPR.			
ANGULAR: ± 3 ARC MIN		MFG APPR.			
TWO PLACE DECIMAL: ± 0.10		QA	Ann Chen	SIZE A DWG.NO. L-DX002010076Z REV 0	
THREE PLACE DECIMAL: ± 0.05		COMMENTS			
INTERPRET GEOMETRIC TOLERANCING PER:		DO NOT SCALE DRAWING	PROJECT NO.	SCALE:	WEIGHT:
MATERIAL H-K9L					
FINISH					
					SHEET 1 OF 1