
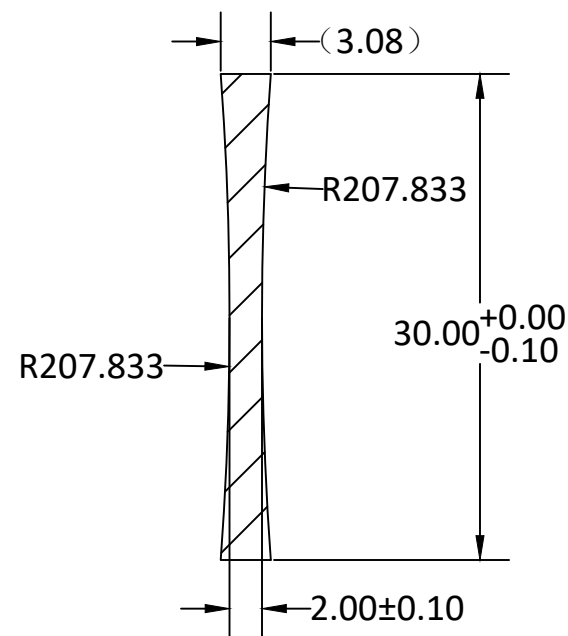


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
207.833 CC	±0.25%	2	1	90%	30.00	+0/-0.10	H-K9L	517642	2.00	±0.10
207.833 CC	±0.25%	2	1	90%						

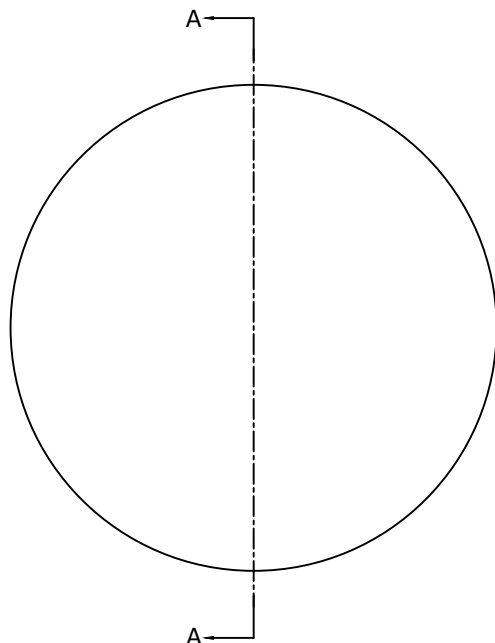

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $-200.75 \pm 2\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 3.0' MINUTES MAX
10. COATING: UNCOATED

						
UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05	DRAWN			TITLE: DIAMETER 30MM, EFL -200.75MM, H-K9L BICONCAVE LENS		
	CHECK					
	ENG APPR.					
	MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	01.04.25			
MATERIAL H-K9L	COMMENTS			SIZE	DWG.NO.	REV
FINISH				A	L-DC0010200030	0
DO NOT SCALE DRAWING	PROJECT NO.			SCALE:	WEIGHT:	SHEET 1 OF 1



TITLE:
DIAMETER 30MM, EFL -200.75MM, H-K9L BICONCAVE LENS

SIZE **A** DWG.NO. **L-DC0010200030** REV **0**