
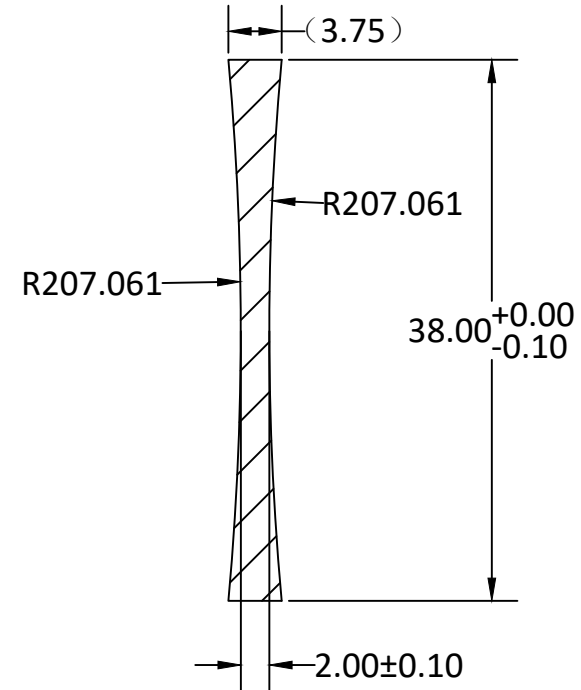


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
207.061 CC	±2.07	3	1	90%	25.00	+0/-0.10	H-K9L	517642	2.00	±0.10
207.061 CC	±2.07	3	1	90%						

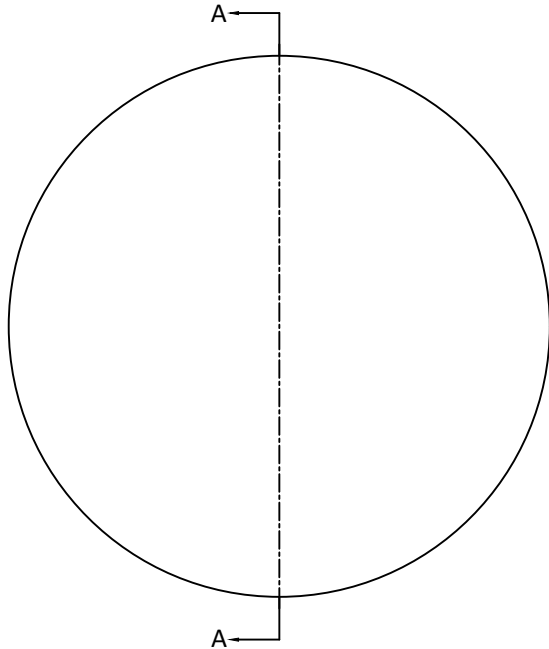

SECTION A-A

Notes:

- ALL DIMENSIONS IN MM
- TOLERANCE UNLESS SPECIFIED ± 0.10
- MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
- MANUFACTURE PER MIL-PRF-13830
- POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
- FOCAL LENGTH(EFL): $-200 \pm 2\%$
- SURFACE QUALITY : 40-20 SCRATCH-DIG
- CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
- CENTRATION TOLERANCE: 3.0' MINUTES MAX
- COATING: UNCOATED

UNLESS OTHERWISE SPECIFIED:			NAME	DATE				
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN						
		CHECK						
		ENG APPR.						
		MFG APPR.						
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	01.04.25	TITLE: DIAMETER 38MM, EFL -200MM, H-K9L BICONCAVE LENS			
MATERIAL H-K9L		COMMENTS						
FINISH								
DO NOT SCALE DRAWING		PROJECT NO.			SIZE A	DWG.NO. L-DC0010200038		REV 0
					SCALE:	WEIGHT:	SHEET 1 OF 1	