
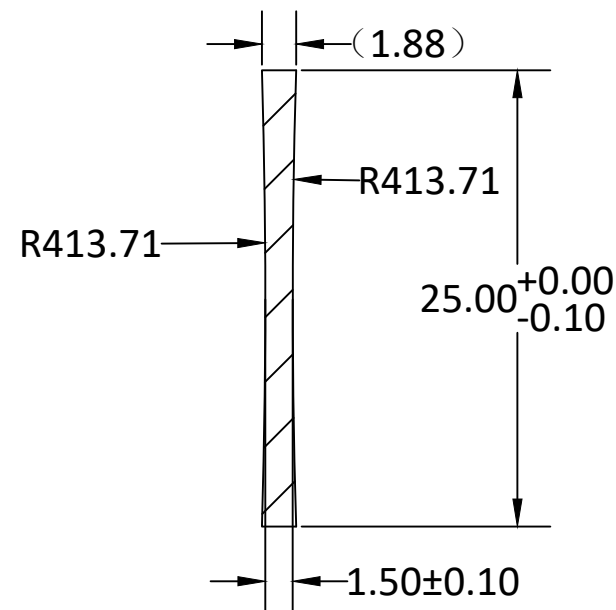


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
413.71 CC	±2.07	3	1	90%	25.00	+0/-0.10	H-K9L	517642	1.50	±0.10
413.71 CC	±2.07	3	1	90%						

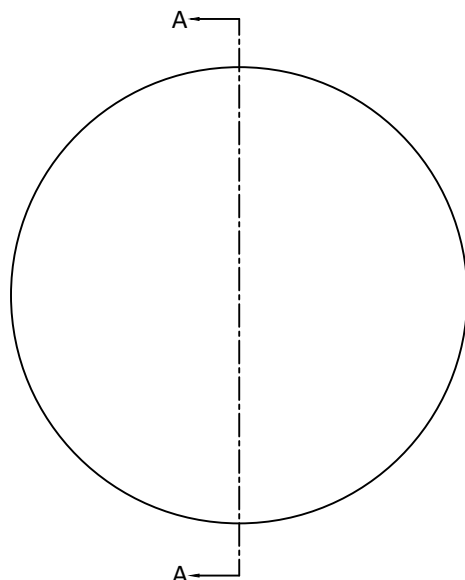

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $-400 \pm 2\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 3.0' MINUTES MAX
10. COATING: S1 & S2: $\frac{1}{4}$ WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400-700nm H-K9L

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA TITLE: DIAMETER 25MM, EFL -400MM, H-K9L, MgF2 COATED, BICONCAVE LENS	
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN				
		CHECK				
		ENG APPR.				
		MFG APPR.				
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	01.04.25	SIZE A DWG.NO. L-DC0020400025 REV 0		
MATERIAL H-K9L	COMMENTS					
FINISH						
DO NOT SCALE DRAWING	PROJECT NO.			SCALE:	WEIGHT:	SHEET 1 OF 1