
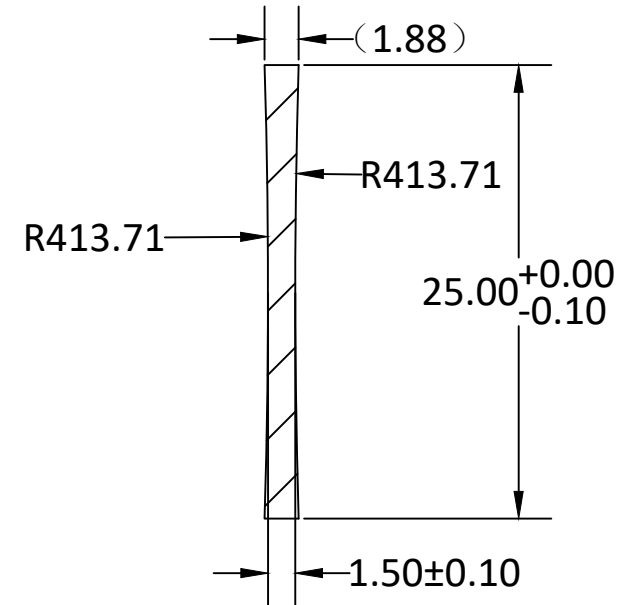


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
413.71 CC	±2.07	3	1	90%	25.00	+0/-0.10	H-K9L	517642	1.50	±0.10
413.71 CC	±2.07	3	1	90%						

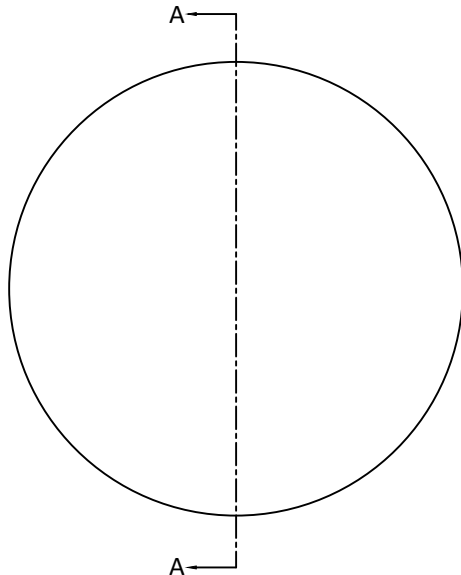

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $-400 \pm 2\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 3.0' MINUTES MAX
10. COATING: S1 & S2: Ravg0.5% @ 630-1100nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE						
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN			TITLE: DIAMETER 25MM, EFL -400MM, H-K9L, NIR 1 COATED, BICONCAVE LENS					
		CHECK								
		ENG APPR.								
		MFG APPR.								
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	01.04.25	SIZE A DWG.NO. L-DC0050400025 REV 0					
MATERIAL H-K9L		COMMENTS								
FINISH										
DO NOT SCALE DRAWING		PROJECT NO.			SCALE:		WEIGHT:		SHEET 1 OF 1	