
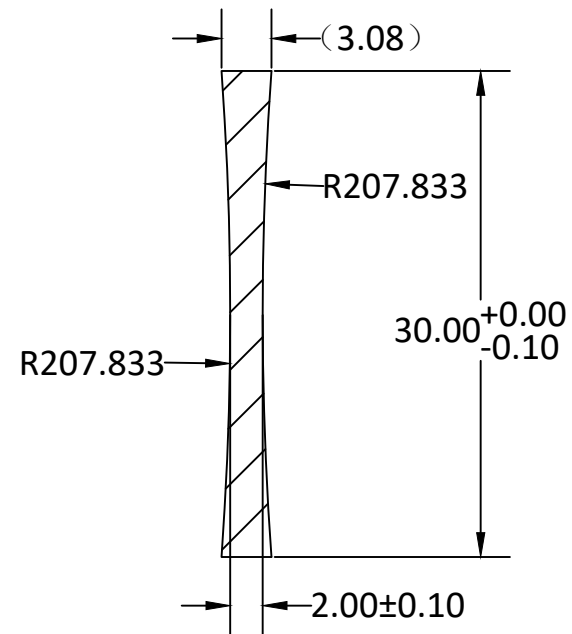


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
207.833 CC	±0.25%	2	1	90%	30.00	+0/-0.10	H-K9L	517642	2.00	±0.10
207.833 CC	±0.25%	2	1	90%						

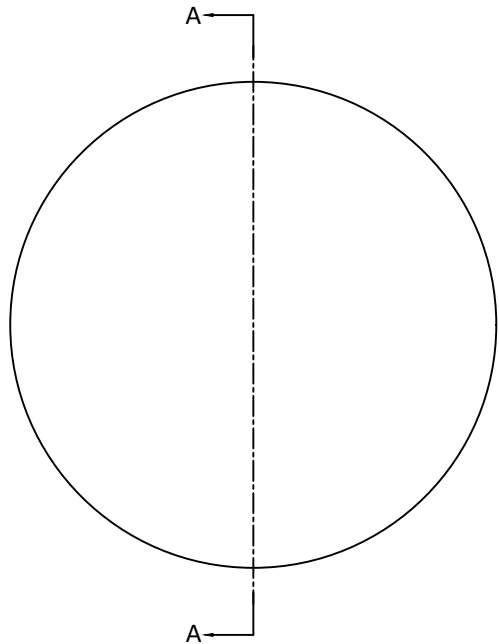

SECTION A-A

Notes:

- ALL DIMENSIONS IN MM
- TOLERANCE UNLESS SPECIFIED ± 0.10
- MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
- MANUFACTURE PER MIL-PRF-13830
- POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
- FOCAL LENGTH(EFL): $-200.75 \pm 2\%$
- SURFACE QUALITY : 40-20 SCRATCH-DIG
- CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
- CENTRATION TOLERANCE: 3.0' MINUTES MAX
- COATING: S1 & S2: Ravg0.5% @ 630-1100nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL $\pm$ ANGULAR: ± 3 ARC MIN TWO PLACE DECIMAL: ± 0.10 THREE PLACE DECIMAL: ± 0.05	DRAWN				
	CHECK				
	ENG APPR.				
	MFG APPR.				
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	01.04.25	TITLE: DIAMETER 30MM, EFL -200.75MM, H-K9L, NIR 1 COATED, BICONCAVE LENS	
MATERIAL H-K9L	COMMENTS			SIZE A	DWG.NO. L-DC0050200030
FINISH				REV 0	
DO NOT SCALE DRAWING	PROJECT NO.			SCALE:	WEIGHT:
				SHEET 1 OF 1	