
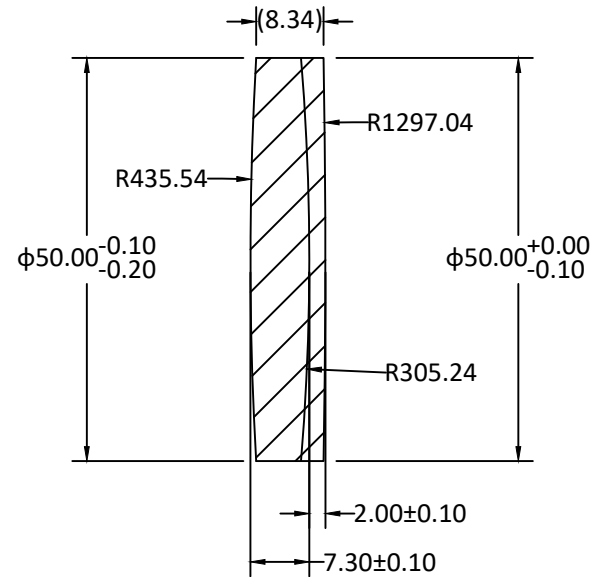


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
435.54 CX	±0.25%	3	1	90%	50.00	-0.1/-0.2	N-BK7	517-642	7.30	±0.10
305.24	±0.25%	3	1	90%	50.00	+0/-0.1	H-F3	617-367	2.00	±0.10
1297.04 CX	±0.25%	3	1	90%						

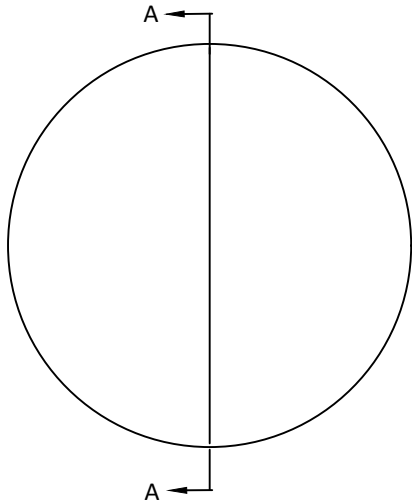

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL GRADE B, FA PER MIL-G-174, SCHOTT OR EQUIVALENT, RoHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. SURFACE QUALITY : 60-40 SCRATCH-DIG
7. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
8. CENTRATION TOLERANCE: 3.0' MINUTES MAX
9. EFL: 750MM $\pm 2\%$
10. DESIGN WAVELENGTH: 587.6NM
11. COATING: S1 & S3: SINGLE LAYER MGF2@550NM PER MIL-C-675C, MODERATE ABRASION
12. CEMENT USING NORLAND NOA61 OR EQUIVALENT

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 MANUFACTURER FROM CHINA TITLE: DIAMETER 50MM, EFL 750MM, MgF2 COATED, ACHROMAT LENS	
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05	DRAWN	Sally Song	12.16.24			
	CHECK					
	ENG APPR.					
	MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	12.18.24			
MATERIAL	COMMENTS				SIZE DWG.NO. REV	
FINISH					A L-AC0020750050 0	
DO NOT SCALE DRAWING	PROJECT NO.			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1