
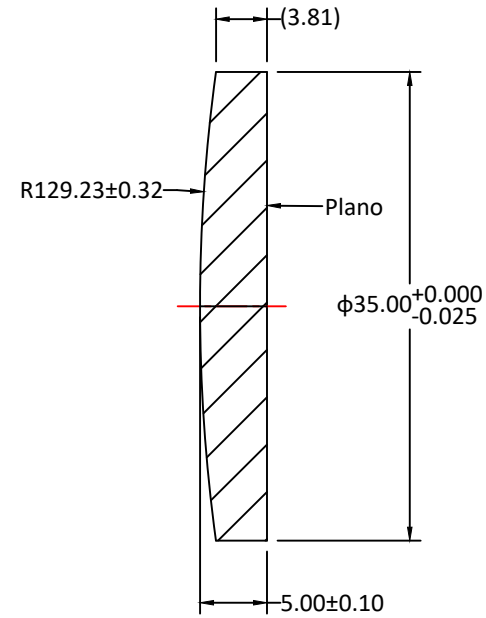



| RADIUS | R TOL | POWER | IRRG | CA | DIA | DIA TOL | MATERIAL | INDEX | CT | CT TOL |
|-----------|-------|-------|------|-----|-------|-----------|----------|--------|------|--------|
| 129.23 CX | ±0.32 | 3 | 0.5 | 90% | 35.00 | +0/-0.025 | H-K9L | 517642 | 5.00 | ±0.10 |
| Plano | - | 3 | 0.5 | 90% | | | | | | |

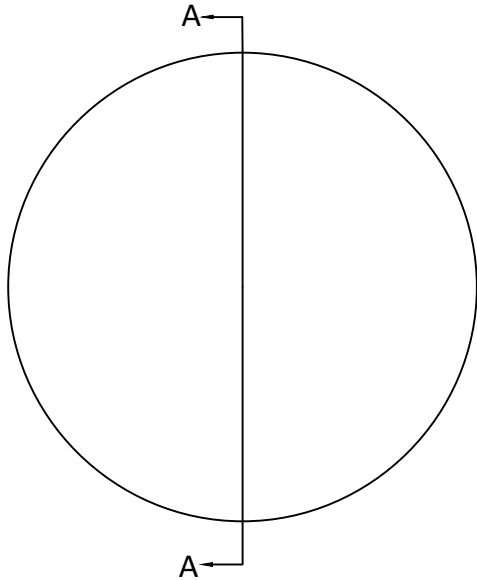

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $250.00 \pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: $R_{avg} < 0.35\%$ @ 420-680nm @ 0° AOI

| | | | | |
|--------------------------------------|--|-------------|------------|---|
| UNLESS OTHERWISE SPECIFIED: | | NAME | DATE |  |
| DIMENSIONS ARE IN mm | | DRAWN | Sally Song | |
| TOLERANCES: | | CHECK | | |
| FRACTIONAL \pm | | ENG APPR. | | |
| ANGULAR: ± 3 ARC MIN | | MFG APPR. | | |
| TWO PLACE DECIMAL: ± 0.10 | | QA | Ann Chen | 12.18.24 |
| THREE PLACE DECIMAL: ± 0.05 | | COMMENTS | | TITLE: |
| INTERPRET GEOMETRIC TOLERANCING PER: | | | | DIAMETER 35.00MM, EFL 250.00MM, H-K9L, VIS 0 COATED, PLANO-CONVEX LENS |
| MATERIAL H-K9L | | | | SIZE DWG.NO. |
| FINISH | | | | A L-PX0030250035 |
| DO NOT SCALE DRAWING | | PROJECT NO. | | REV 0 |
| | | SCALE: | WEIGHT: | SHEET 1 OF 1 |